
LED MIRRORED ASSEMBLY INSTRUCTIONS

Thank you for purchasing JIAXING CHENGTAI MIRRORS.
Please read the instructions carefully to ensure safe operation of the product.

PRODUCT NAME	CTL202
SIZE	DIA 80 CM
POWER SOURCE	230-240V, 50HZ
MIRROR GLASS	5MM COPPER FREE MIRROR
LED	2835 LED, 3000k-6000k
CERTIFICATION	CE, IP44, ROHS

Package Contents Checklist

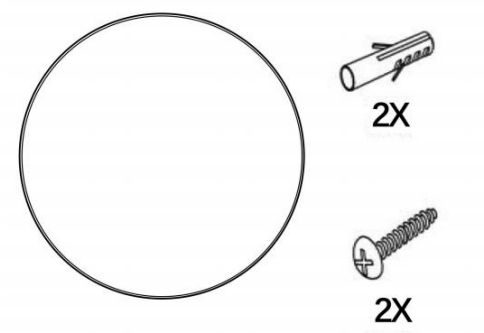


PLEASE READ this sheet prior to assembly to familiarize yourself with the various stages of construction. Carefully open the pack supplied and check the contents against the parts and check list. Do not destroy any of the packaging you are certain that you have all the necessary parts for the assembly.

CAUTION: There are small components used in the construction of this unit. These loose items should be kept away from young children whilst assembling your unit to avoid the danger of choking hazards.


Tools Required:




How to install:

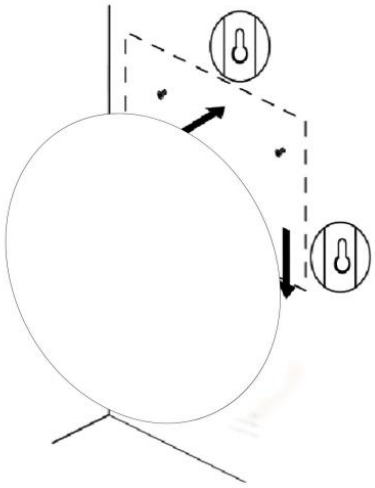

1. Ensure the wall (bearing wall) for installation could afford the weight of mirror.

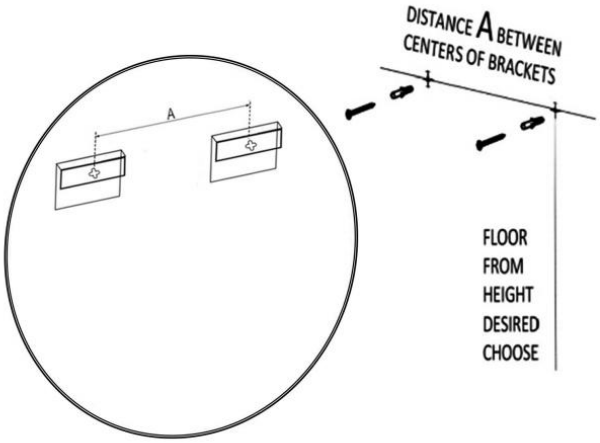


2. Measure the distance between central points of two hanging holes at the back of mirror with tape.




Mark central point on the wall

3. Determine the position of two central points on the wall with tape at the installation position, and then mark with pencil.




Drill the hole

4. Drill the hole at the central point of the marked position with the percussion drilling.




Insert the expansion screws

5. Insert the dowels into the drilled hole with hammer.

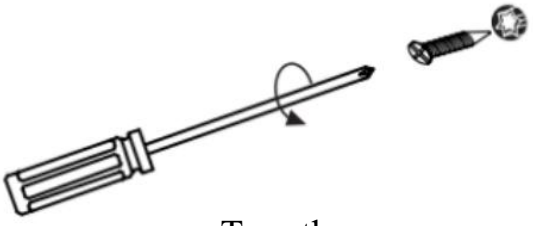

Turn the screw

6. Screw in the screw until 5 mm remain

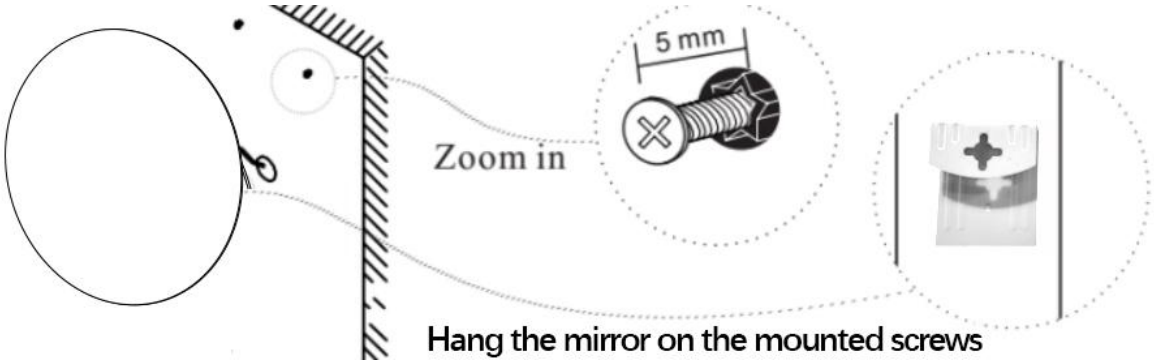


7. Hang the mirror onto the screw. Finally, connect the power, and touch the sensor to test the product. Touch the sensor to turn on/off the light.


About the wire connection:

There are two ways to connect the circuit for the mirror.

Connection way 1： Plug the 2-pin plug in the socket on the wall.

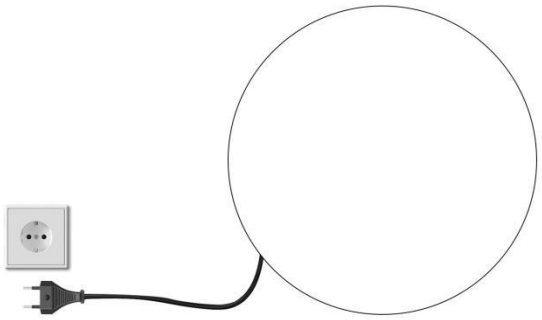

Connection way 2： Cut of the plug, and connect the mirror's wire to the wall switch's wire. (Recommend installation by professional electrician)

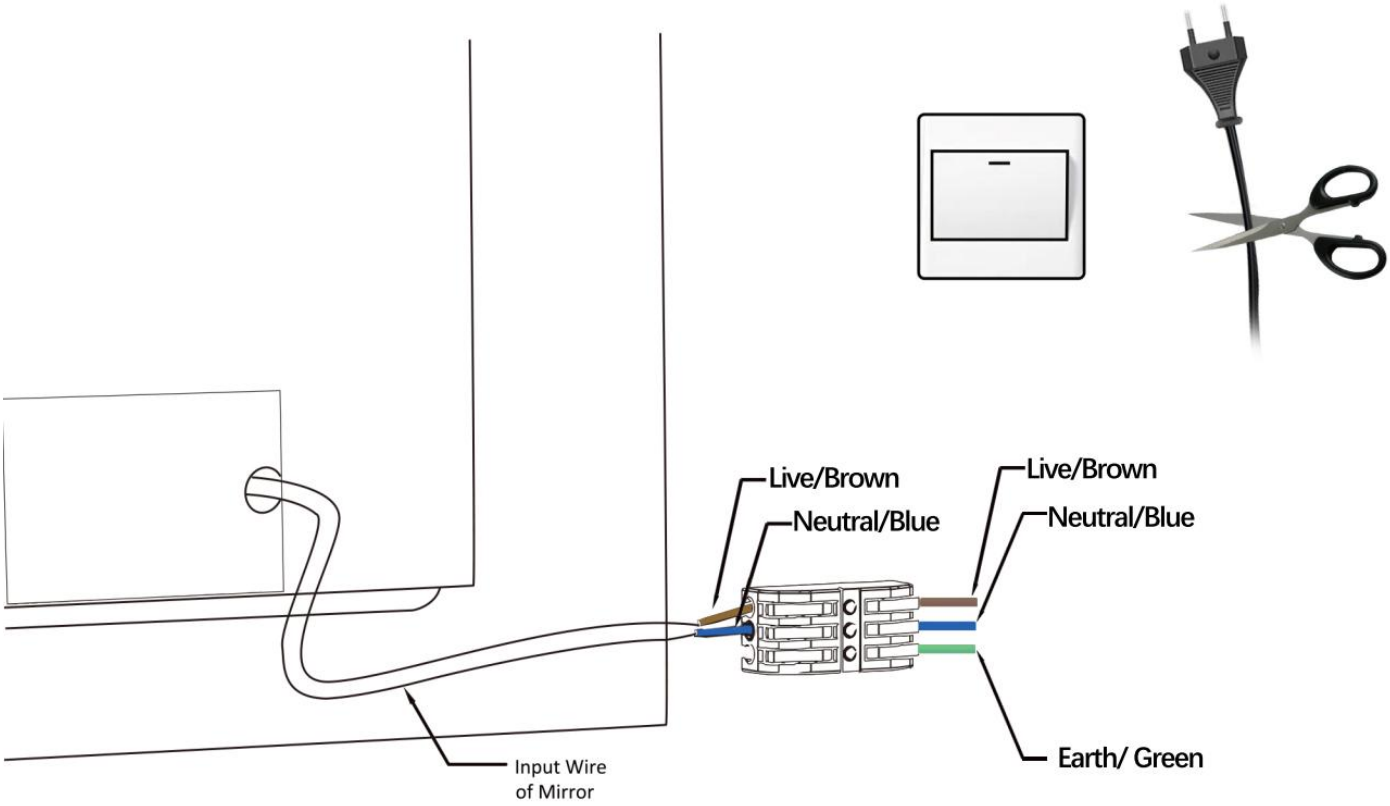

Cleaning:

- When the mirror has to be cleaned, please switch off the power first.
- NO NOT use abrasives or solvents when cleaning.
- NO NOT let water get in the mirror and submerge mirror in water.
- Wipe off all water spillages as soon as possible via a soft, damp cloth.

- Please avoid harsh, corrosive and abrasive cleaners
- Please keep dry and avoid damp environments.

HOW TO USE



1. Turn on LED light and anti fog function

Power on, briefly press the button to turn on the light, then press the sensor again to turn on the anti fog function. When the anti fog function is turned on, the sensor is in ***blue light***.

2. Adjust the led color

Long press the touch button to adjust the LED light color from warm light - neutral light - white light (from 3000K-6000K)

3. Turn off LED light and anti fog function

Short press the sensor again to turn off the light and anti fog function.

